


User Manual

Model TLL151061



2 USB Ports Car Charger

- A. The positive contact spring
- B. The cathode contact spring
- C. Power light
- D. 2 USB output charging
- E. QC 3.0 output: (5Vdc/3A, 9Vdc/2A, 12Vdc/1.5A)
- F. USB output: 2.4A



Warning

- Keep out of reach of children.
- Do not disassemble the product
- Do not place the product on damp air or water, keep it dry.
- Do not place the product in the environment of high temperature or extreme environments.



Contact us:
E-mail: office@tellur.ro
Web: www.tellur.ro
Address: Marinariilor Street no.29, Bucharest, Romania
Phone: +40 21 233 09 95

2USB Car Charger

It can support various mobile terminals used in the car, like mobile phone, iPad, eBook, GPS, etc.

Specification

Application	Applicable to a variety of mobile phones and mobile devices
Input	DC 12V-24V
QC 3.0 Output	3.6V-6.5V/3A, 6.5V-9V/2A, 9V-12V/1.5A
USB Smart Output	5Vdc/2.4A
Output	DC 5V 5.4A Max
Size	69x23x25 mm
Weight	23.5 g
Power Light	Led blue indicator light


Qualcomm quick charge 3.0 technology: up to 4X faster than standard chargers, able to charge compatible devices to 80% in just 35 minutes, using the USB port with QC 3.0 technology and compatible cable.

Instructions:


1. The car charger with USB data cable connects to the mobile phone or mobile device which needs to be recharged.
2. Put the car charger into the car cigarette lighter, blue light turns on.
3. Determine the loading level according to the charging display of the device
4. It can recharge two devices at the same time.

USB Car Charger


1· Below is 3A USB QC 3.0 output charging for phone

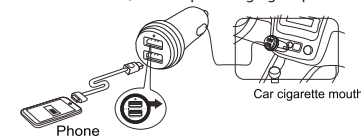

2. Below is 2.4A USB output charging for tablet PC

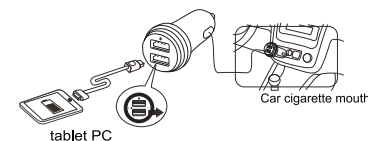

3. Below is 2 USB output charging at the same time:

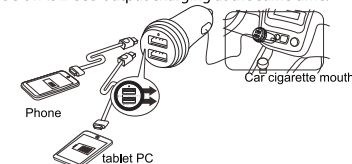


Manual de utilizare

Model TLL151061



Incarcator Auto - 2 porturi USB

- A. Arc pentru contact sarcina pozitiva
- B. Arc pentru contact catodic
- C. Lumina martor
- D. Doua porturi USB pentru incarcare
- E. Iesire QC 3.0: (5Vdc/3A, 9Vdc/2A, 12Vdc/1.5A)
- F. Iesire port USB: 2.4 A



Atentionare

- A nu se lasa la indemana copiilor.
- Nu dezasamblati produsul.
- A se feri de: umezeala, caldura puternica, apa, razele soarelui sau intr-un mediu extrem.



Contactati-ne:
E-mail: office@tellur.ro
Web: www.tellur.ro
Adresa: Str. Marinariilor nr. 29, Bucuresti, Romania
Telefon: 021.233.09.95

Incarcator Auto - 2 porturi USB

Poate incarca orice dispozitiv cu incarcare de 5V (telefon, tableta, GPS, etc)

Specificatii

Aplicabilitate	Incarcarea unui spectru larg de dispozitive mobile
Putere intrare	DC 12V-24V
Putere iesire port 1	3.6V-6.5V/3A, 6.5V-9V/2A, 9V-12V/1.5A
Putere iesire port 2	5Vdc/2.4A
Putere iesire totala	DC 5V 5.4A Max
Dimensiuni	69x23x25 mm
Greutate	23.5 g
Lumina martor	Indicator led albastru


De pana la 4 ori mai rapid decat incarcatoarele standard, tehnologia Qualcomm quick charge 3.0 inseamna posibilitatea de a incarca dispozitivele compatibile pana la 80% in doar 35 minute, folosind portul USB cu tehnologie QC 3.0 si cablu compatibil.

Instructiuni


1. Incarcatorul auto se conecteaza prin intermediul cablului de date la dispozitivul care necesita incarcare.
2. Inserati incarcatorul auto in bricheta masinii. Lumina LED de culoare albastra se va aprinde.
3. Determinarea nivelului de incarcare se face prin verificarea dispozitivului.
4. Poate incarca doua dispozitive simultan.

USB Car Charger

1. Se recomanda portul QC 3.0 3A pentru reincarcarea telefoanelor.



2. Se recomanda portul 2.4 A pentru reincarcarea tabletelor.



3. Incarcarea simultana a doua dispozitive.

