




PDW102 10000mAh wireless power bank

TLL158281-User manual



INTO YOUR FUTURE


1. Product appearance

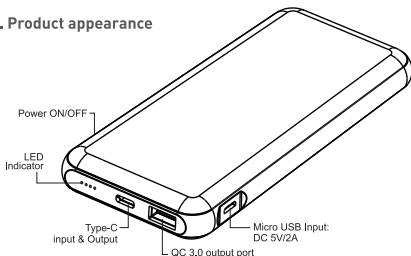

2. Specifications

- Battery: Li-polymer
- Capacity: 10000mAh
- Type-C input (PD 3.0): 5V/2.4A, 9V/2A (18W)
- Micro-USB input: 5V/2A
- Type-C output (PD 3.0): 5V/3A, 9V/2A, 12V/1.5A (18W)
- USB output (QC 3.0): 5V/3A, 9V/2A, 12V.1.5A (18W)
- Wireless output: 5V/1A, 9V/1.1A (10W max)
- Total output: 3A
- Total power: 18W
- Protection functions: Short circuit, overcharging, overdischarging, overcurrent
- Features: Battery level LED indicator, matte finish material that enhances grip
- Rapid recharge time: 3-4H with 18W Power Delivery Charger + USB-C to Type-C Cable (not included)
- Wireless charging compatibility: iPhone 12 mini/ 12/ 12 Pro/ 12 Pro Max, iPhone 11/ 11 Pro/ 11 Max, iPhone XR/ X/ XS Max/ XS, iPhone8/ 8 Plus, Samsung Note 20 Ultra/ Note 20/ S20 FE/ S20 Ultra/ S20+/ S20/ S10+/ S10/ S10e/ S9/ S9+/ S8/ Note 8/ S7 Edge, Google 5, LG G6, LG G6 Plus, LG V30 and other Qi compatible device
- Compatible PD devices: iPhone 12 mini/ iPhone 12/ iPhone 12 Pro/ iPhone 12 Pro Max/ iPhone 11/ 11 Pro/ 11 Max/ XR/ X/ XS Max/ XS/ 8 Plus/ 8, Samsung Note 20 Ultra/ Note 20/ S20 FE/ S20 Ultra/ S20+/ S20/ S10+/ S10/ S10e, Google Pixel 5/ 4a/ 4 XL/ 4/ 3a XL/ 3a/ 3 XL/ 3"
- Compatibility: Universal
- Package includes: 1 x PDW102 10000mAh wireless power bank / 1 x USB - Type-C cable, 20cm / 1 x Manual
- Product dimensions: 144 x 69 x 16mm
- Product weight: 220g

Charging your device

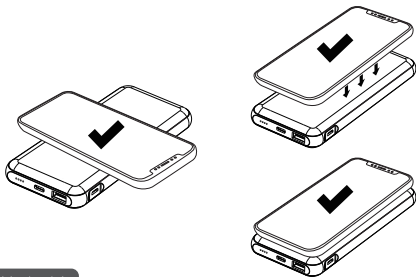


Method 1

To wirelessly recharge your device:

1. Place a compatible phone or tablet on the wireless charging zone
2. Press the power button once to activate charging for your device

Note: Please do not place metallic objects over the wireless charging zone while charging your device

Method 2

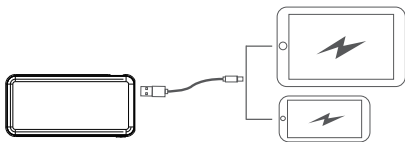

To cable charge your device:

1. Connect your device to the power bank using a USB-A to Type-C or Type-C to Type-C charging cable

When using the wireless charger, the LED indicator will light up accordingly.

Status indicator Introductions	
Status indication	Flashing status
Power-on	The LED indicators light up
Standby	Off status
Charging	Green light is on
Abnormal	The green light keeps blinking

When using the USB charging, the LED indicator will light up accordingly to indicate the battery level of your charger.

● LED on / ○ LED off

Indicator	Battery Level
●●●●	100% - 75%
●●●○	75% - 50%
●●○○	50% - 25%
●○○○	< 25%

Recharging the power bank

1. Use a 2A adapter to achieve the fastest recharge through Micro USB port.
2. Use a Quick Charge 3.0 adapter or 18W Power Delivery charger to achieve fastest recharge through USB-C port.

◎Flashing / ● LED on / ○ LED off

Indicator	Battery Level
◎○○○	0% - 25 %
●◎○○	25% - 50%
●●◎○	50% - 75%
●●●◎	> 75% < 100%
●●●●	100%

Notices

Do not place too close to a magnetic card with a magnetic stripe or chip (ID card, bank card, etc.) to avoid magnetic failure.

Do not place metal or metal shell on the wireless charging dock.

Avoid strong blows and collisions with this product.

This product is a high-precision electronic product. Do not disassemble or modify by yourself.

Avoid using the product in the following environments: high temperature, low air pressure, humidity, excessive dust, strong magnetic field, and prolonged exposure to the sun. We recommend using this product in an environment where the altitude is less than 3,000 meters, 0° to 35° C and 5% to 95% humidity.

The product should not be exposed to water and water splashes. Product accessories should not be placed next to liquid filled items such as cups.

Please keep at least 20cm distance between an implanted medical device (pacemaker, implantable cochlea etc) and the power bank in order to avoid potential interference.

- Please use the charger that only meets the requirements of this manual to charge the product, using a charger that does not comply with this instruction may cause danger.
- Please dispose of discarded products and accessories in accordance with relevant local environmental regulations.
- If you have any problems when using this product, please contact your local distributor or directly contact our customer care service.
- Please understand that there will not have prior notice if the product has any changes.



■ The crossed-out wheeled-bin symbol on your product, battery, literature or packaging reminds you that all electronic products and batteries must be taken to separate waste collection points at the end of their working lives; they must not be disposed of in the normal waste stream with household garbage. It is the responsibility of the user to dispose of the equipment using a designated collection point or service for separate recycling of waste electrical and electronic equipment (WEEE) and batteries according to local laws. Proper collection and recycling of your equipment helps ensure EEE waste is recycled in a manner that conserves valuable materials and protects human health and the environment, improper handling, accidental breakage, damage, and/or improper recycling at the end of its life may be harmful for health and environment.